


LPG REGULATOR MODEL AT09 NORDIC

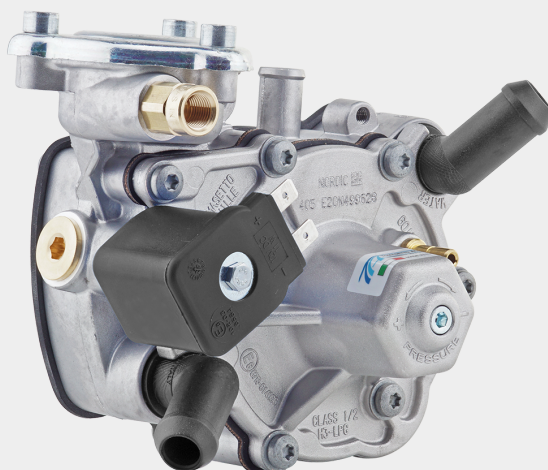

REGULATOR FOR SEQUENTIAL INJECTION SYSTEMS WITH INTEGRATED FILTER

The **AT09 Nordic** reducer has established itself as the benchmark for reliability and performance in LPG systems. As the successful evolution of the **AT09 family**, it delivers **enhanced performance compared to the previous Alaska and Artic models**. The **AT09 Nordic reducer** stands out for its **precision, reliability, and safety**.

Key Features & Improvements:

- **Integral Body:** The single-body construction enhances durability and minimizes the risk of leaks, ensuring long-term reliability in demanding conditions.
- **Complete Separation of Gas and Water Circuits:** The independent design of the circuits prevents thermal interference, allowing for more efficient heat transfer and stable gas flow.
- **Pre-Heating of Gas at Reducer's Inlet:** This feature improves LPG vaporization, especially in low-temperature conditions, ensuring a consistent fuel supply to the engine.
- **Optimized Circuit Design:** The improved LPG flow path and deeper water circuit provide better heat exchange, contributing to stable performance and enhanced efficiency.

Tomasetto Achille Spa

Via del Progresso, 47/53 - 36020 Castegnero (Vicenza) Italia - Tel +39 0444 638326 - Fax +39 0444 639367

- info@tomasetto.com

Cod. Fiscale, P. IVA e n Reg. Impr. VI 00931330245 - R.E.A. 281289 - Capitale sociale 1.000.000 Euro i.v. -

PEC: tomasetto@pec.telemar.it

With its **advanced engineering and refined design**, the **AT09 Nordic** ensures **efficient, reliable, and safe** performance in LPG conversion systems.

AT09 Nordic maintenance kit: [RGAT2085V](#)

SKU: RGAT3890V

PRODUCT DESCRIPTION

VERSION	NORDIC
Type of product	LPG sequential regulator
Material	Die cast aluminium body
Weight	1.30 kg
Dimensions (mm)	125x125x105 mm
Max inlet pressure	3 MPa (30 bar)
Outlet pressure *	Adjustable from 90 to 180 kPa
Coil voltage	12 V DC
Coil power	11 W
Coil connection	Fast-on (AMP upon request)
Inlet connection	M10x1 pipe Ø 6 mm
Outlet connection	Fixed fitting Ø 12 mm
Engine power	Up to 125 kW
MAP connection	Ø 6 mm fitting

* referred to the MAP

Tomasetto Achille Spa

Via del Progresso, 47/53 – 36020 Castegnero (Vicenza) Italia – Tel +39 0444 638326 – Fax +39 0444 639367

– info@tomasetto.com

Cod. Fiscale, P. IVA e n Reg. Impr. VI 00931330245 – R.E.A. 281289 – Capitale sociale 1.000.000 Euro i.v. –

PEC: tomasetto@pec.telemar.it